

XE-MINI/ED PLUS SERIES

ELECTRIC SELF-PROPELLED MINI SCISSOR LIFTS


Mantall®

Standard Features

- Proportional Controls
- Self-lock gate on platform
- Extended Platform
- Drivable at full height
- Non-marking Tires
- 4 x 2WD
- Automatic brake system
- Emergency lowering system
- Emergency stop button
- Explosion-proof of the tubing
- Diagnosis system
- Tilt sensor with Alarm
- Horn
- Flash light
- Hour meter
- Safety Brackets
- Forklift Pockets

Options Features

- Overload sensor
- AC power to platform

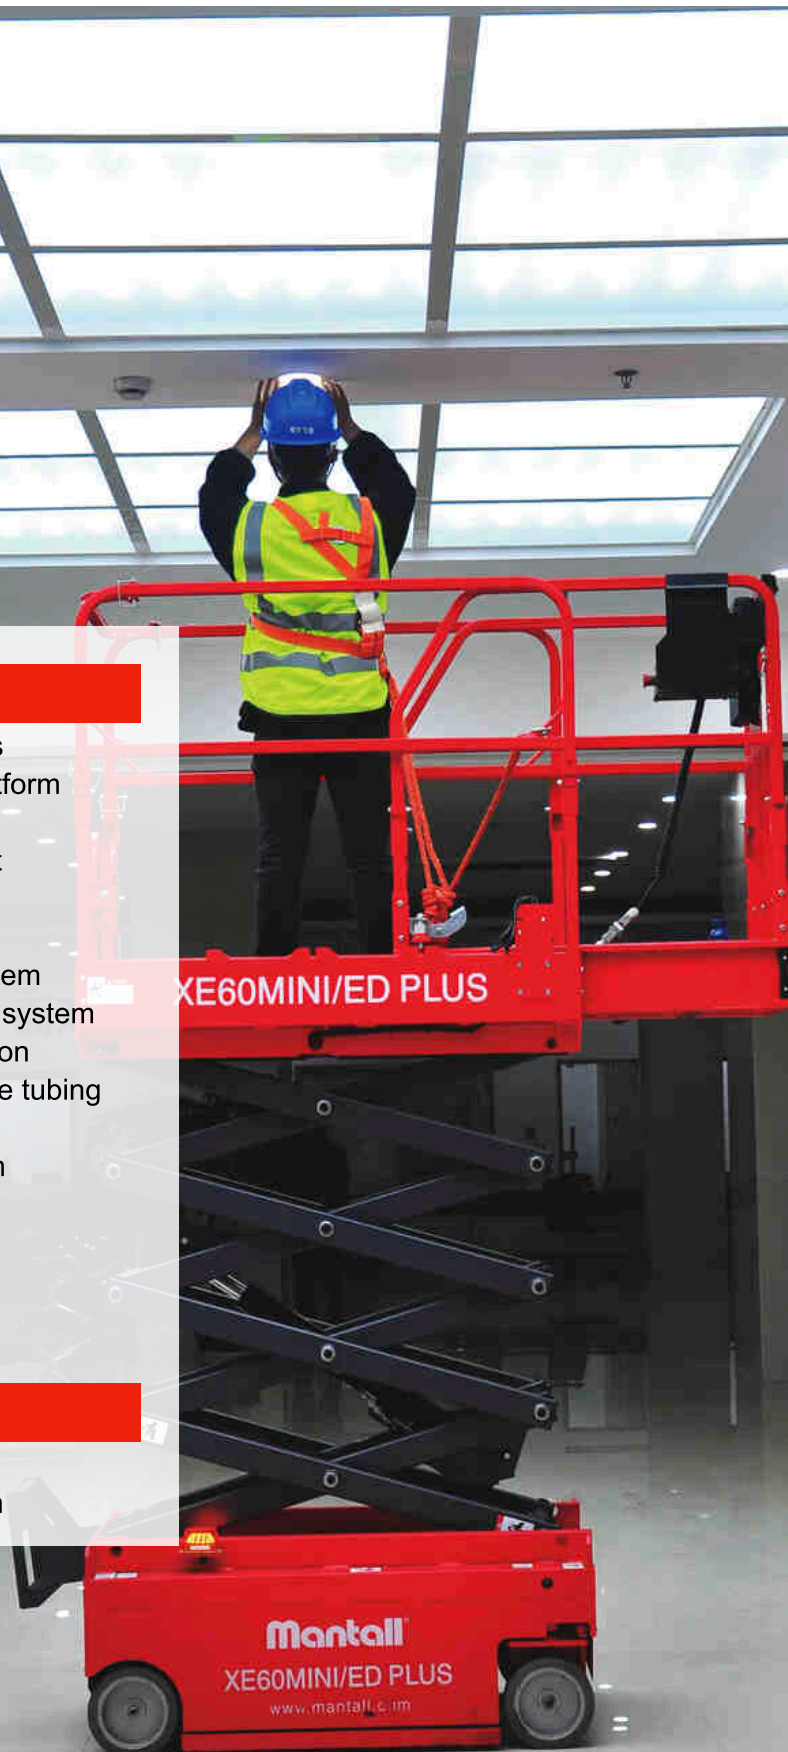

XE-MINI/ED PLUS SERIES

MODEL	XE50MINI/ED PLUS	XE60MINI/ED PLUS
Working height max H1	5.4 m	6.4 m
Platform height max H2	3.4 m	4.4 m
Length - Platform extension	0.55 m	
Lifting capacity	240 kg	
Lift capacity on the extension	100 kg	
Dimension of the platform B x C x A	1.28 x 0.76 x 1.1 m	
Platform length - extended K	1.83 m	
Platform skirting board height L	0.17 m	
Overall length and width E x F	1.49 x 0.76 m	
Height stowed D	1.95 m	2.03 m
Height - guardrails folded M	1.5 m	1.59 m
Wheelbase G	1.05 m	
Ground clearance H	0.06 m	
Ground clearance - deployed potholes	0.015 m	
Turning radius - inside	0.35 m	
Rising time / lowering time	20 / 17 s	23 / 19 s
Drive speed - stowed	3 km/h	
Drive speed - raised	0.8 km /h	
Gradeability	25 %	
Tilt sensor - front to back	3°	
Tilt sensor - side to side	2°	
Hydraulic tank capacity	2 L	
Non-marking tyres	230 mm	
Max. platform occupancy	2 pers	
Power source	24 V	
Weight	760 kg	820 kg

